MAYTAG

Built-In Cooking

Maytag® Built-In Cooking

Built Strong to Last Long

Contents

Maytag® Built-In Cooking 5

Wall Ovens 7

Cooktops 19

Kitchen Hoods 26

Glossary 28

Maytag® Built-In Cooking

From durable door hinges and oven racks to sturdy cast-iron and porcelain-enamel cooktop surfaces, Maytag brand follows the wisdom that if you build it strong, you build it to last. In fact, the value of these elements and the performance expected of them are never overlooked or underestimated.

Built-in ovens and cooktops. Together as Dependable Duos, they not only deliver abundant strength and performance, but they create a unified group of appliances designed to accomplish every built-in cooking task: baking, broiling, simmering and boiling. Plus, when cooking is through, kitchen hoods add a third level of performance to keep kitchen air clear.

Maytag® 24", 27" & 30" Wall Ovens

Is this product right for you?

Would you like to cook your food faster without sacrificing taste and consistency?

The Precision Cooking™ system with Precise Preheat provides consistent heating throughout the oven for uniform baking and broiling. Models with the EvenAir™ true convection cooking system also have a fan and third heating element that circulates heated air to cook 30% faster than a conventional oven.

Would you like to set oven time and temperature without guesswork?

Reliable Electronic Touch oven controls offer easy-to-use touch-pad operation and precise temperature adjustment. Plus, wall ovens feature many one-touch cooking selections like the Cook & Hold, Favorite, and Keep Warm™ settings.

Is space at a premium in your kitchen, but you still want the look and performance of a built-in oven?

Built-in ovens with a 24" width can accommodate virtually any kitchen set-up where a narrower width is necessary. Now you can get the performance and style of a built-in oven without sacrificing precious space.

MAYTAG
380°
647
Clean
Bake
Broil
Upper Oven
Lower Oven
Start
1 2 3
4 5 6
7 8 9
Favorite 0 Autocook

Electric Wall Oven
Key Features

Four-Pane Glass Windows & Heavy-Duty, DuraForced™ Racks

Four layers of glass in the window keep heat within the oven and the kitchen cool. Inside, the oven racks are extra strong to withstand the constant weight of cookware bearing down on them.

Reliable Electronic Touch Controls

These easy-to-use, touch-pad controls offer one-step oven operation and precise temperature adjustment.



EvenAir™ True Convection with Third Element and Auto Conversion

Uses a high-wattage element and fan to keep oven temperature consistent, providing uniform browning, even baking and faster roasting. Auto Conversion converts time and temperature to eliminate guesswork.

Electric Double Wall Ovens

MEW6630DD
30" Width

3.8 cu. ft. capacity
(each oven)

Convection upper oven

W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC6430BDW/B to create a Dependable Duo.

MEW5630DD
30" Width

3.8 cu. ft. capacity
(each oven)

W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

MMW5530DA
30" Width

2.1 cu. ft. capacity
(upper microwave)
3.8 cu. ft. capacity
(lower oven)

W/B

Add Electric Cooktop MEC5430BDW/B or Gas Cooktop MGC6430BDW/B to create a Dependable Duo.

MEW6627DD
27" Width

3.3 cu. ft. capacity
(each oven)

Convection upper oven

W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC6430BDW/B to create a Dependable Duo.

MEW5627DD
27" Width

3.3 cu. ft. capacity
(each oven)

W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

Available Colors

(W) *White*
(B) *Black*
(S) *Stainless Steel*

	27"		30"		Microwave Combination
MODELS	**MEW6627DD**	**MEW5627DD**	**MEW6630DD**	**MEW5630DD**	**MMW5530DA**
EvenAir™ true convection with third element and Auto Conversion	Upper		Upper		
Precision Cooking™ system with Precise Preheat	•	•	•	•	•
Self-cleaning oven with adjustable levels	Upper/Lower	Upper/Lower	Upper/Lower	Upper/Lower	•
Upper microwave					1,100 Watt
Dual-control Bake/Broil elements	•	•	•	•	•
Control lockout	•	•	•	•	•
Sabbath Mode	•	•	•	•	•
Automatic oven light	•	•	•	•	•
Super-Size oven window	•	•	•	•	•
Porcelain-enamel broiler pan	•	•	•	•	•
Oven rack positions (upper/lower)	4/4	4/4	4/4	4/4	4 Lower
DuraForced™ oven racks (upper/lower)	2	2	2	2	2 Lower
Create-A-Space™ half-rack (74009590A)	1	Optional	1	Optional	Optional
CONTROL FEATURES					
Reliable Electronic Touch oven controls	•	•	•	•	•
Keep Warm™ and Delay Bake/Clean settings	•	•	•	•	•
Cook & Hold setting (upper oven)	•	•	•	•	•
Favorite setting	•	•	•	•	•
OVEN WATTAGE @ 240V					
EvenAir™ convection element (1,850 Watt)	•		•		•
Bake element (2,800 Watt)	•	•	•	•	•
Six-Pass™ broil element (3,600 Watt)	•	•	•	•	•
EXTERIOR FEATURES					
Frameless glass-front oven door	•	•	•	•	•
Heavy-duty door hinges	•	•	•	•	•
Metal door handle	•	•	•	•	•
SPECIFICATIONS					
Dimensions *(Overall Height x Overall Width x Overall Depth)*	50-1/4" x 26-3/4" x 24-7/16"	50-1/4" x 26-3/4" x 24-7/16"	50-1/4" x 29-3/4" x 24-7/16"	50-1/4" x 29-3/4" x 24-7/16"	47-5/8" x 29-3/4" x 24-7/16"

Electric Single Wall Ovens

MEW6530DD
30" Width
3.8 cu. ft. capacity
Convection oven
W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC6430BDW/B to create a Dependable Duo.

MEW5530DD
30" Width
3.3 cu. ft. capacity
W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

MEW6527DD
27" Width
3.3 cu. ft. capacity
Convection oven
W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC6430BDW/B to create a Dependable Duo.

MEW5527DD
27" Width
3.3 cu. ft. capacity
W/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

Available Colors

(W) *White*
(B) *Black*
(S) *Stainless Steel*

	27"		30"	
MODELS	**MEW6527DD**	**MEW5527DD**	**MEW6530DD**	**MEW5530DD**
EvenAir™ true convection with third element and Auto Conversion	•		•	
Precision Cooking™ system with Precise Preheat	•	•	•	•
Self-cleaning oven with adjustable levels	•	•	•	•
Dual-control Bake/Broil elements	•	•	•	•
Control lockout	•	•	•	•
Sabbath Mode	•	•	•	•
Automatic oven light	•	•	•	•
Super-Size oven window	•	•	•	•
Porcelain-enamel broiler pan	•	•	•	•
Oven rack positions (upper/lower)	4	4	4	4
DuraForced™ oven racks (upper/lower)	2	2	2	2
Create-A-Space™ half-rack (74009590A)	1	Optional	1	Optional
CONTROL FEATURES				
Reliable Electronic Touch oven controls	•	•	•	•
Electronic clock with timer	•	•	•	•
Keep Warm™, Cook & Hold and Delay Bake/Clean settings	•	•	•	•
Favorite setting	•	•	•	•
OVEN WATTAGE @ 240V				
EvenAir™ convection element (1,850 Watt)	•		•	
Bake element (2,800 Watt)	•	•	•	•
Six-Pass™ broil element (3,600 Watt)	•	•	•	•
EXTERIOR FEATURES				
Frameless glass-front oven door	•	•	•	•
Heavy-duty door hinges	•	•	•	•
Metal door handle	•	•	•	•
SPECIFICATIONS				
Dimensions *(Overall Height x Overall Width x Overall Depth)*	28-5/8" x 26-3/4" x 26-3/4"	28-5/8" x 26-3/4" x 26-3/4"	28-5/8" x 29-3/4" x 26-3/4"	28-5/8" x 29-3/4" x 26-3/4"

24" Wall Oven
Key Features

Heavy-Duty Hinges

The hinges on 24" wall ovens provide a lifetime of stability for the oven door.

24" Width

These ovens feature a narrow width that allows for installation in kitchens where space is at a premium.

Precision Cooking™ System & Broiler Compartment

Bake and broil two different types of food at the same time with a lower broiler compartment. Plus, while you broil, the upper oven ensures even cooking throughout with the Precision Cooking™ system.

24" Double Wall Ovens

CWE5800AC

24" Width
Electric

2.6 cu. ft. capacity
(self-cleaning upper oven)
2.2 cu. ft. capacity
(lower oven)

B

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

CWE5100AC

24" Width
Electric

2.6 cu. ft. capacity
(upper oven)
2.2 cu. ft. capacity
(lower oven)

B

Add Electric Cooktop MEC4430AAB or Gas Cooktop MGC4430BDB to create a Dependable Duo.

Available Q4 2008

CWG3600AA

24" Width
Gas

2.7 cu. ft. capacity
(upper oven)
2.2 cu. ft. capacity
(lower oven)

B/S

Add Gas Cooktop GC4430BDB/C or Electric Cooktop MEC4430BDB/C to create a Dependable Duo.

24" Single Wall Ovens

CWE4800AC

24" Width
Electric

2.6 cu. ft. capacity
(self-cleaning)

E/B/S

Add Electric Cooktop MEC5430BDW/B/S or Gas Cooktop MGC5430BDW/B/S to create a Dependable Duo.

CWE4100AC

24" Width
Electric

2.6 cu. ft. capacity

E/B

Add Electric Cooktop MEC4430AAW/B or Gas Cooktop MGC4430BDW/B to create a Dependable Duo.

Available Q4 2008

CWG3100AA

24" Width
Gas

2.7 cu. ft. capacity
(upper oven)
1.3 cu. ft. capacity
(lower broiler)

E/B/S

Add Gas Cooktop MGC4430BDW/B/C or Electric Cooktop MEC4430AAW/B/C to create a Dependable Duo.

Available Colors

(E) *White*
(B) *Black*
(S) *Stainless Steel*

	Double Electric		Single Gas w/Broiler	Single Electric		Single Gas w/Broiler
MODELS	**CWE5800AC**	**CWE5100AC***	**CWG3600AA**	**CWE4800AC**	**CWE4100AC***	**CWG3100AA**
Precision Cooking™ system with Precise Preheat	•	•	•	•	•	•
Self-cleaning oven	Upper	Standard	Standard	•	Standard	Standard
Dual-control Bake/Broil elements	•	•		•	•	
Oven light	•	•	•	•	•	•
Standard oven window	•	•	•	•	•	•
Number of ovens	2	2	1	1	1	1
Standard broiler compartment						•
Extra-large broiler compartment window with light			•			
Oven rack positions (upper/lower)	4/3	4/3	4/3	4	4	4/2
Oven racks (upper/lower)	2/1	2/1	2/1	2	2	2/1
CONTROL FEATURES						
Reliable Electronic Touch oven controls	•	•	•	•	•	•
Delay-Start oven control	•	•	•	•	•	•
Electronic clock with timer	•	•	•	•	•	•
WATTAGE @ 240V/BTUS						
Bake	2,400W	2,400W	16,000 BTUs	2,400W	2,400W	16,000 BTUs
Broil	3,000W	3,000W	16,000 BTUs	3,000W	3,000W	16,000 BTUs
EXTERIOR FEATURES						
Frameless glass-front oven door	•	•	•	•	•	•
Heavy-duty door hinges	•	•	•	•	•	•
OVEN CAPACITY						
Upper (cu. ft.)	2.6	2.6	2.7	2.6	2.6	2.7
Lower (cu. ft.)	2.2	2.2	2.2			1.3
SPECIFICATIONS						
Dimensions *(Overall Height x Overall Width x Overall Depth)*	46-5/16" x 23-7/8" x 24-5/8"	46-5/16" x 23-7/8" x 22-5/8"	46-5/16" x 23-7/8" x 24-5/8"	29-5/8" x 23-7/8" x 24-5/8"	29-5/8" x 23-7/8" x 22-5/8"	39-1/4" x 23-7/8" x 25"

*Available Q4 2008

Maytag® Cooktops

Is this product right for you?

Does your built-in cooktop provide the kind of high performance you need in the kitchen?

Select Maytag® built-in cooktops have PowerBoost™ burners and Flex-Choice™ melting burners that produce high heat for rapid boiling and frying, and variable heat for a wide range of cooking tasks, respectively. Also, the smart port burner design allows heat to conduct to the pan instead of the grate, extending the life of your cooktop.

Is your current cooktop easy to clean? Has it maintained its finish?

Maytag® built-in electric cooktops feature a smooth glass surface that comes clean with a simple wipe. The gas cooktops feature DuraClean™ cast-iron burner grates that allow you to move large pots and pans without worry and are dishwasher safe. They can take a serious scrubbing and still stay looking their best.

Cooktop
Key Features

Smart Port Burner Design

Features burners ranging from 12,500 BTUs down to a simmering 650. Heat is conducted to the pan instead of the grate, extending the life of the cooktop.

6"/9" Dual Radiant Element

Allows you to match the electric heat source to your pan size for the most efficient use of cooking power.

DuraClean™ Heavy-Duty Cast-Iron Burner Grates

Makes moving and using large pots and pans easier. The durable porcelain-coated surface takes a scrubbing without scratching to stay looking its best.

Electric Cooktops

MEC5536BA
36" Width
W/B/S

Add Electric Wall Oven MEW6530DDW/B/S or MEW6630DDW/B/S to create a Dependable Duo.

MEC4436AA
36" Width
W/B/C

Add Electric Wall Oven CWE5100ACB or Gas Wall Oven CWG3600AAB/S to create a Dependable Duo.

MEC5430BD
30" Width
W/B/S

Add Electric Wall Oven MEW6530DDW/B/S or MEW6630DDW/B/S to create a Dependable Duo.



MEC4430AA
30" Width
W/B

Add Electric Wall Oven CWE5100ACB or Gas Wall Oven CWG3600AAB/S to create a Dependable Duo.

Available Colors

(W) *White*
(B) *Black*
(S) *Stainless Steel*
(C) *Chrome with Black Knobs*

	30" Models		36" Models	
	Glass-Ceramic	Coil	Glass-Ceramic	Coil
MODELS	**MEC5430BD**	**MEC4430AA**	**MEC5536BA**	**MEC4436AA**
Smooth glass-ceramic surface	•		•	
Porcelain-enamel surface		•		•
Chrome drip bowls		•		•
Frameless design	•	•	•	•
Easy-clean design	•	•	•	•
CONTROL FEATURES				
Pull-off control knobs	•	•	•	
Element-in-Use/Hot surface indicator lights	•	•	•	•
ELEMENT WATTAGE @ 240V/208V				
Insta-Heat™ radiant surface elements	4		5	
Heavy-duty coil elements		4		5
6", 1,500-Watt coil elements		LF, RR		LF, RR
8", 2,350-Watt coil elements		LR, RF		LR, RF
6", 1,200-Watt radiant elements	RR		LF, Center	Center
7", 1,800-Watt radiant element	LF			
8", 2,000-Watt radiant element	LR		RR	
9", 2,500-Watt radiant element			LR	
9"/6", 2,400-/1,000-Watt dual radiant element	RF		RF	
Accepts optional Big-Pot element*		•		•
SPECIFICATIONS				
Dimensions *(Overall Height x Overall Width x Overall Depth)*	3-3/4" x 29-15/16" x 21"	2-7/8" x 30" x 21"	3-3/4" x 35-5/16" x 21"	3-3/8" x 35-5/16" x 21-1/4"

*Order Big-Pot element, Model #CE1.

Gas Cooktops

MGC6536BD
36" Width

Tempered-glass surface

W/B

Add Wall Oven MEW6630DDW/B or MEW6627DDW/B to create a Dependable Duo.

MGC5536BD
36" Width

W/B/S

Add Wall Oven MEW5630DDW/B/S or MEW5627DDW/B/S to create a Dependable Duo.

MGC4436BD
36" Width

W/B/C

Add Wall Oven CWE5100ACB or CWG3600AAB/S to create a Dependable Duo.

MGC6430BD
30" Width

Tempered-glass surface

W/B

Add Wall Oven MEW6630DDW/B or MEW6627DDW/B to create a Dependable Duo.



MGC5430BD
30" Width

W/B/S

Add Wall Oven MEW5630DDW/B/S or MEW5627DDW/B/S to create a Dependable Duo.

MGC4430BD
30" Width

W/B/C

Add Wall Oven CWE5100ACB or CWG3600AAB/S to create a Dependable Duo.

Available Colors

(W) *White*
(B) *Black*
(S) *Stainless Steel*
(C) *Chrome with Black Knobs*

	30" Models			36" Models		
	Gas-on-Glass	Porcelain Enamel	Porcelain Enamel	Gas-on-Glass	Porcelain Enamel	Porcelain Enamel
MODELS	**MGC6430BD**	**MGC5430BD**	**MGC4430BD**	**MGC6536BD**	**MGC5536BD**	**MGC4436BD**
Tempered-glass surface	•			•		
Porcelain-enamel surface		•	•		•	•
Continuous DuraClean™ cast-iron burner grates	•	•		•	•	
Porcelain-enamel grate finish	•	•	•	•	•	•
DuraClean™ lift-off burner caps	•	•	•	•	•	•
Frameless design	•	•	•	•	•	•
CONTROL FEATURES						
Pull-off control knobs	•	•		•	•	
Precision-Set burner controls	•	•		•	•	
BURNERS						
Sealed-surface burners	4	4	4	5	5	5
Pilotless electronic ignition	•	•	•	•	•	•
Convertible to LP (No additional kit needed)	•	•	•	•	•	•
5,000-/650*-BTU Flex-Choice™ simmer burner	LR	LR		Center	Center	Center
9,200-/9,100*-BTU burners	LF, RR	LF, RR	LF, LR, RR	LF, RR	LF, RR	LF, RR
10,500-/9,100*-BTU PowerBoost™ burner				LR	LR	LR
12,500-/10,500*-BTU PowerBoost™ burner	RF	RF	RF	RF	RF	RF
SPECIFICATIONS						
Dimensions *(Overall Height x Overall Width x Overall Depth)*	3-13/16" x 30" x 21"	3-13/16" x 29-1/2" x 21-1/2"	3-13/16" x 29-1/2" x 21-1/2"	3-13/16" x 36" x 21"	3-13/16" x 36" x 21"	3-13/16" x 36" x 21"

*Numbers note natural gas/LP.

Kitchen Hoods

UXT5436AD
36" Width
S

UXT5430AD
30" Width
W/Q/B/S

UXT5236AD
36" Width
W/Q/B/S

UXT5230AD
30" Width
W/Q/B/S



UXT4036AD
36" Width
W/B

UXT4030AD
30" Width
W/Q/B/S

UXT3036A
36" Width
W/B/S

UXT3030A
30" Width
W/B/S

UXT2036A
36" Width
W/B

UXT2030A
30" Width
W/B

Available Colors

(W) *White*
(B) *Black*
(Q) *Bisque*
(S) *Stainless Steel*

	36" Models					30" Models				
MODELS	UXT5436AD	UXT5236AD	UXT4036AD	UXT3036A	UXT2036A	UXT5430AD	UXT5230AD	UXT4030AD	UXT3030A	UXT2030A
CONTROLS										
Electronic Touch controls	•					•				
Slide controls							•			
Delayed shutoff	•					•				
Speed settings	3	3	2	2	2	3	3	2	2	2
Halogen lighting included	•					•				
Incandescent lighting		•					•			
Lighting levels	2	2	1	1	1	2	2	1	1	1
VENTILATION										
Filterless self-cleaning	•	•				•	•			
Three-way convertible ventilation	•	•				•	•			
Vertical ventilation on 7" round duct					•					•
Vertical or horizontal ventilation on 3-1/4" x 10" duct				•					•	
Ductless ventilation with charcoal filter	Optional*	Optional*	•			Optional*	Optional*	•		
Rating (CFM)	400	250		160	190	400	250		160	190

*HRECUXT30 for 30" models; HRECUXT36 for 36" models.
NOTE: Models UXT4030AD and UXT4036AD are shipped with aluminum filter and include charcoal pad for ductless ventilation.

Glossary

9"/6" Dual Radiant Element
Allows you to match the electric heat source to your pan size.

Cook & Hold Setting
Automatically reduces oven temperature after cooking time is up, keeping dishes warm for up to one hour.

Create-A-Space™ Half-Rack
Creates additional cooking space in the oven, so you can cook more items at once.

DuraClean™ Heavy-Duty Continuous Cast-Iron Burner Grates
Makes using and moving large pots and pans easier. The durable porcelain-coated cast-iron surface takes a scrubbing without scratching to stay looking its best.

EvenAir™ True Convection with Auto Conversion
Uses a high-wattage element and fan to keep oven temperature consistent, providing uniform browning, even baking and faster roasting. Auto Conversion converts time or temperature to eliminate guesswork.

Flex-Choice™ Melting Element/Burner
Provides flexible levels of heat for a full-power element/burner and warm setting in one.

Four-Pane Glass Windows
Help retain heat inside the oven and keep the rest of the kitchen cool.

Frameless Design
This door design features a stylish, flush glass surface that's easy to clean.

Heavy-Duty Hinges
These hinges provide a lifetime of stability for the oven door.

Keep Warm™ Setting
Keeps food warm so everything is hot and ready to serve at once.

PowerBoost™ Burner
These high-heat burners provide the power necessary for large cooking jobs, like stir-frying and canning.

Precise Preheat
Preheats the oven based on the actual temperature you select—not a preset time—for accuracy and better results.

Precision Cooking™ System
Ensures even cooking throughout the oven for exceptional results and dependable performance.

Precision Warming™ Center
This dedicated fifth cooktop element keeps cooked food warm and frees up other elements for additional meal preparation.

Reliable Electronic Touch Oven Controls
These easy-to-use touch-pad electronic controls offer precise temperature adjustment.

Sealed Surface Burners with Electronic Ignition
These burners are sealed for even heating, easy cleanup and extended grate life. Electronic ignition lights the burner without the hassle of a pilot light.

Self-Cleaning with Adjustable Levels
Allows you to match the cleaning level to the amount of food buildup in the oven—light, medium or heavy.

Smart Port Burner Design
Features burners ranging from 12,500 BTUs down to a simmering 650. Heat is conducted to the pan instead of the grate, extending the life of the cooktop.

Smoothtop Glass-Ceramic Cooking Surface
This cooktop surface takes a hard scrubbing without scratching, so it is easy to clean.

Upswept Cooktop Design
The raised edges of this cooktop design help contain spills for easy cleanup.

Wall Oven Specifications

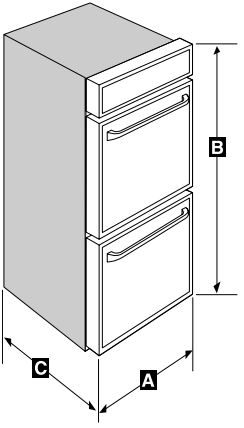

	Product Dimensions					
30" & 27" Electric Wall Oven	A Width – in. (cm)	B Height – in. (cm)	C Depth – in. (cm)	Under-Counter/ Cooktop Installation	Approximate Shipping Weight – lbs. (kg)	Total Connected Load (KW @ 240V/208V)
MEW6630DD	29-3/4 (75.6)	50-1/4 (127.6)	24-7/16 (62.1)		235 (106)	7.2/5.4
MEW6627DD	26-3/4 (67.9)	50-1/4 (127.6)	24-7/16 (62.1)		238 (108)	7.2/5.4
MEW5630DD	29-3/4 (75.6)	50-1/4 (127.6)	24-7/16 (62.1)		235 (106)	7.2/5.4
MEW5627DD	26-3/4 (67.9)	50-1/4 (127.6)	24-7/16 (62.1)		238 (108)	7.2/5.4
MEW6530DD	29-3/4 (75.6)	28-5/8 (72.7)	26-3/4 (67.9)	•	140 (63)	3.6/2.7
MEW6527DD	26-3/4 (67.9)	28-5/8 (72.7)	26-3/4 (67.9)		130 (59)	3.6/2.7
MEW5530DD	29-3/4 (75.6)	28-5/8 (72.7)	26-3/4 (67.9)	•	140 (63)	3.6/2.7
MEW5527DD	26-3/4 (67.9)	28-5/8 (72.7)	26-3/4 (67.9)		130 (59)	3.6/2.7
MMW5530DA	29-3/4 (75.6)	47-5/8 (121)	24-7/16 (62.1)		194 (88)	6.6/5.7

All dimensions shown are for planning purposes only. Consult the installation instructions that accompany each product before cutting cabinets or countertops.
All Maytag® wall ovens are UL-, AGA-, CSA- or CGA-approved. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



30" & 27" Single Electric Wall Ovens	Cutout Dimensions									
	A Width – in. (cm)	B Depth – in. (cm)	C Cutout Height – in. (cm)	D Cutout Width – in. (cm)	E Cutout Depth – in. (cm)	F Overall Height – in. (cm)	G Overall Width – in. (cm)	H Overall Depth – in. (cm)	I Bottom Clearance – in. (cm)	J Overhead Clearance – in. (cm)
MEW6530DD, MEW5530DD	30 (76.2) min.	24 (61) min.	27-7/8 ± 1/16 (70.8 ± .2)	28-1/2 ± 1/16 (72.4 ± .2)	24 (61) min.	28-1/4 (71.8)	29-3/4 (75.6)	24-7/16 (62.1)	4 – 33 (10.2 – 83.8)	1 (2.54) min.
MEW6527DD, MEW5527DD	27 (68.6) min.	24 (61) min.	27-7/8 ± 1/16 (70.8 ± .2)	25-1/2 ± 1/16 (64.8 ± .2)	24 (61) min.	28-1/4 (71.8)	26-3/4 (67.9)	24-7/16 (62.1)	4 – 33 (10.2 – 83.8)	1 (2.54) min.

1. 1-1/4" diameter conduit access hole.
2. Install 5/8" plywood bottom for floor (must support 142 pounds).
3. Allow for 1/4" trim overlap on each side.
4. Do not block air intake slots along bottom of oven.



30" Electric Wall Oven / Microwave Combo	Cutout Dimensions									
	A Width – in. (cm)	B Depth – in. (cm)	C Cutout Height – in. (cm)	D Cutout Width – in. (cm)	E Cutout Depth – in. (cm)	F Overall Height – in. (cm)	G Overall Width – in. (cm)	H Overall Depth – in. (cm)	I Bottom Clearance – in. (cm)	J Overhead Clearance – in. (cm)
MMW5530DA	30 (76.2) min.	24 (61) min.	47 ± 1/16 (119.4 ± .2)	24 (61) min.	28-1/2 ± 1/16 (72.4 ± .2)	47-5/8 (121)	29-3/4 (75.6)	24-7/16 (62.1)	4 – 20 (10.2 – 50.8)	1 (2.54) min.

1. 1-1/4" diameter conduit access hole. Hole must be cut as close to corner of cabinet as possible.
2. Install 5/8" plywood bottom for floor (must support 250 pounds).
3. Do not block air intake slots along bottom of oven.

Wall Oven Specifications



30" & 27" Double Electric Wall Ovens	Cutout Dimensions									
	A Width – in. (cm)	B Depth – in. (cm)	C Cutout Height – in. (cm)	D Cutout Width – in. (cm)	E Cutout Depth – in. (cm)	F Overall Height – in. (cm)	G Overall Width – in. (cm)	H Overall Depth – in. (cm)	I Bottom Clearance – in. (cm)	J Overhead Clearance – in. (cm)
MEW6630DD, MEW5630DD	30 (76.2) min.	24 (61) min.	50 ± 1/16 (127 ± .2)	28-1/2 ± 1/16 (72.4 ± .2)	24 (61) min.	50-1/4 (127.6)	29-3/4 (75.6)	24-7/16 (62.1)	4 – 12 (10.2 – 30.5)	1 (2.54) min.
MEW6627DD, MEW5627DD	27 (68.6) min.	24 (61) min.	50 ± 1/16 (127 ± .2)	25-1/2 ± 1/16 (64.8 ± .2)	24 (61) min.	50-1/4 (127.6)	26-3/4 (68)	24-7/16 (62.1)	4 – 12 (10.2 – 30.5)	1 (2.54) min.

1. 1-1/4" diameter conduit access hole.
2. Install 5/8" plywood bottom for floor (must support 142 pounds).
3. Do not block air intake slots along bottom of oven.

All dimensions shown are for planning purposes only. Consult the installation instructions that accompany each product before cutting cabinets or countertops.
All Maytag® wall ovens are UL-, AGA-, CSA- or CGA-approved. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



30" Under-Counter Wall Oven	Cutout Dimensions											
	A Overall Width – in. (cm)	**B** Overall Depth – in. (cm)	**C** Overall Height – in. (cm)	**D** Counter Depth – in. (cm)	**E** Counter Height – in. (cm)	**F** Cabinet Depth – in. (cm)	**G** Cabinet Height – in. (cm)	**H** Cutout Width – in. (cm)	**I** Cutout Depth – in. (cm)	**J** Cutout Height – in. (cm)	**K** Electric & Induction Clearance – in. (cm)	**K** 4-Burner Gas Stamped & Glass Top Clearance – in. (cm)
MEW6530DD, MEW5530DD	28-1/4 (71.8)	29-3/4 (75.6)	24-7/16 (62.1)	25 (63.5)	1-1/2 (3.8)	24 (61) min.	36 (91.4)	28-1/2 ± 1/16 (72.4 ± .2)	24 (61) min.	27-7/8 ± 1/16 (70.8 ± .2)	3-1/8 (7.9) min.	4-13/16 (12.2) min.

1. 1-1/4" diameter conduit access hole. Hole must be cut as close to corner of cabinet as possible.
2. Install 5/8" plywood bottom for floor (must support 142 pounds).
3. Do not block air intake slots along bottom of oven.
4. Gas or electric cooktops may be installed over ovens. See cooktop installation instructions for cutout size; see dealer for approved cooktops.
5. Electrical connection for electric cooktop must be in adjacent accessible location. Cooktop and wall oven must be on separate 120/240- or 120/208-volt, 60 Hz, AC circuits.

Wall Oven Specifications



	Cutout Dimensions									
24" Single Electric Wall Oven	A Width – in. (cm)	B Depth – in. (cm)	C Overall Width – in. (cm)	D Overall Depth – in. (cm)	E Overall Height – in. (cm)	F Overall Bottom Clearance – in. (cm)	G Overall Overhead Clearance – in. (cm)	H Cutout Width – in. (cm)	I Cutout Depth – in. (cm)	J Cutout Height – in. (cm)
CWE4800AC	24 (61) min.	2-1/16 (5.2)	23-7/8 (60.6)	24-5/8 (62.5)	29-5/8 (75.2)	33-1/4 (84.5) min.	1-1/2 (3.8) min.	22 (55.9) min.	24 (61) min.	28-11/16 (72.9)
CWE4100AC	24 (61) min.	2-1/16 (5.2)	23-7/8 (60.6)	22-5/8 (57.5)	29-5/8 (75.2)	33-1/4 (84.5) min.	1-1/2 (3.8) min.	22 (55.9) min.	24 (61) min.	28-11/16 (72.9)

1. Install 5/8" plywood bottom for floor (must support 142 pounds).
2. Allow for 1/4" trim overlap on each side.
3. Do not block air intake slots along bottom of oven.

All dimensions shown are for planning purposes only. Consult the installation instructions that accompany each product before cutting cabinets or countertops.
All Maytag® wall ovens are UL-, AGA-, CSA- or CGA-approved. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



	Cutout Dimensions								
24" Gas Wall Ovens	A Width – in. (cm)	B Depth – in. (cm)	C Overall Width – in. (cm)	D Overall Depth – in. (cm)	E Overall Height – in. (cm)	F Overall Bottom Clearance – in. (cm)	G Overall Overhead Clearance – in. (cm)	H Cutout Width – in. (cm)	I Cutout Height – in. (cm)
CWG3600AA	24 (61) min.	24 (61) min.	23-7/8 (60.6)	24-5/8 (62.5)	46-5/16 (117.6)	1-5/8 (4.1)	1-1/2 (3.8) min.	22 (55.9) min.	45-3/8 (115.3)
CWG3100AA	24 (61) min.	24 (61) min.	23-7/8 (60.6)	25 (63.5)	39-1/4 (99.7)	1-5/8 (4.1)	1-1/2 (3.8) min.	22 (55.9) min.	38 (96.5)

1. Install 5/8" plywood bottom for floor (must support 250 pounds).
2. Do not block air intake slots along sides and bottom of oven.



	Cutout Dimensions								
24" Double Electric Wall Oven	A Width – in. (cm)	B Depth – in. (cm)	C Overall Width – in. (cm)	D Overall Depth – in. (cm)	E Overall Height – in. (cm)	F Overall Bottom Clearance – in. (cm)	G Overall Overhead Clearance – in. (cm)	H Cutout Width – in. (cm)	I Cutout Height – in. (cm)
CWE5800AC	24 (61) min.	24 (61) min.	23-7/8 (60.6)	24-5/8 (62.5) min.	46-5/16 (117.6)	2-1/16 (5.2)	1-1/2 (3.8) min.	22 (55.9) min.	45-3/8 (115.3)
CWE5100AC	24 (61) min.	24 (61) min.	23-7/8 (60.6)	22-5/8 (57.5) min.	46-5/16 (117.6)	6 (15.2)	4 (10.2)	22 (55.9) min.	45-3/8 (115.3)

1. Allow for 1/4" trim overlap on each side.
2. Install 5/8" plywood bottom for floor (must support 250 pounds).
3. Do not block air intake slots along bottom of oven.

Cooktop Specifications



Electric Cooktops	Cutout Dimensions								
	A Overall Width – in. (cm)	B Overall Depth – in. (cm)	C Overall Height – in. (cm)	D Cutout Width – in. (cm)	E Cutout Depth – in. (cm)	F Back Countertop Clearance – in. (cm)	G Front Countertop Clearance – in. (cm)	H Side Countertop Clearance – in. (cm)	I Clearance Below Countertop – in. (cm)
MEC5536BA	35-5/16 (89.7)	21 (53.3)	3-3/4 (9.5)	34-9/16 (87.8)	20-3/8 (51.8)	4-1/8 (10.5)	2-1/8 (5.4)	0	4-1/8 (10.5)
MEC5430BD	29-15/16 (76)	21 (53.3)	3-3/4 (9.5)	29-1/16 (73.8)	20-3/8 (51.8)	4-1/8 (10.5)	2-1/8 (5.4)	0	4-1/8 (10.5)
MEC4436AA	35-5/16 (89.7)	21-1/4 (54.6)	3-3/8 (8.6)	34-7/8 (88.6)	19-3/4 (50.2)		2-1/8 (5.4)	1 (2.6) min.	3-3/8 (8.6)
MEC4430AA	30 (76.2)	21 (53.3)	2-7/8 (7.3)	28-5/16 (71.9)	19-13/16 (50.3)		2-1/8 (5.4)	0	3-1/4 (8.3)

1. Wire leads. 1/2" (1.3 cm) flexible cable, 3' (.91 m) long, furnished and installed by manufacturer (connected to 240-/120-volt electrical service).
2. Plus clearance inside for right-angle conduit and wire.
3. Clearance above cooktop – 30" (76.2 cm).

All dimensions shown are for planning purposes only. Consult the installation instructions that accompany each product before cutting cabinets or countertops.
All Maytag® cooktops are UL-, AGA-, CSA- or CGA-approved. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



Gas Cooktops	Cutout Dimensions							
	A Overall Width – in. (cm)	B Overall Depth – in. (cm)	C Overall Height – in. (cm)	D Cutout Width – in. (cm)	E Cutout Depth – in. (cm)	F Back Countertop Clearance – in. (cm)	G Front Countertop Clearance – in. (cm)	H Side Countertop Clearance – in. (cm)
MGC6536BD	36 (91.4)	21 (53.3)	3-13/16 (9.7)	34-1/2 (87.6)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	6 (15.2)
MGC5536BD	36 (91.4)	21 (53.3)	3-13/16 (9.7)	34-1/2 (87.6)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	6 (15.2)
MGC6430BD	30 (76.2)	21 (53.3)	3-13/16 (9.7)	28-1/2 (72.4)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	6 (15.2)
MGC5430BD	29-1/2 (74.9)	21-1/2 (54.6)	3-13/16 (9.7)	28-1/2 (72.4)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	6 (15.2)
MGC4436BD	36 (91.4)	21 (53.3)	3-13/16 (9.7)	34-1/2 (87.6)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	3 (7.7) min.
MGC4430BD	29-1/2 (74.9)	21-1/2 (54.6)	3-13/16 (9.7)	28-1/2 (72.4)	19-15/16 (50.6)	1 (2.5)	2-1/8 (5.4)	3 (7.7) min.

1. Burner box height plus manifold entrance – 5-1/4" (13.3 cm).
2. Clearance above cooktop – 30" (76.2 cm).

Cooktops	Specifications		
	Approximate Crated Weight – lbs. (kg)	Countertop/Island/ Peninsula Installation	Total Connected Load (KW @ 240V/208V)
MEC5536BA	57 (25.7)	•	9/6.8
MEC5430BD	45 (20.3)	•	7.4/5.6
MEC4436AA	48 (18.1)	•	8.0/6.0
MEC4430AA	30 (13.5)	•	7.7/5.8
MGC6536BD	72 (32.4)	•	
MGC5536BD	71 (32)	•	
MGC6430BD	64 (28.8)	•	
MGC5430BD	58 (26.1)	•	
MGC4436BD	71 (32.2)	•	
MGC4430BD	55 (24.9)	•	

Kitchen Hood Specifications

REAR VIEW
UXT5236/30AD & UXT5436/30AD



UXT2030A & UXT2036A



UXT3030A & UXT3036A



UXT4030A & UXT4036A



UXT5230/36AD & UXT5430/36AD



All dimensions shown are for planning purposes only. Consult the installation instructions that accompany each product before cutting cabinets or countertops.
All Maytag® kitchen hoods are UL-, AGA-, CSA- or CGA-approved. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

	Cutout Dimensions															
Kitchen Hoods	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	Approx. Shipping Weight – lbs. (kg)
UXT4030AD	12 (30.5)	30 (76.2)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT3030A	12 (30.5)	30 (76.2)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT2030A	12 (30.5)	30 (76.2)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT4036AD	12 (30.5)	36 (91.4)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT3036A	12 (30.5)	36 (91.4)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT2036A	12 (30.5)	36 (91.4)	6 (15.2)	17-1/2 (44.5)	5-1/4 (13.3)	2 (5.1)	9 (22.9)	1-1/2 (3.8)	1 (2.5)	7-1/2 (19.1)	3/4 (1.9)	1-1/2 (3.8)	—	—	—	16 (7)
UXT5430AD	15-5/8 (39.7)	30 (76.2)	6 (15.2)	22-1/4 (56.5)	10-1/2 (26.7)	7/8 (2.2)	10-1/4 (26)	1-3/4 (4.4)	1 (2.5)	7-1/4 (18.4)	3-3/8 (8.6)	11 (27.9)	10 (25.4)	3 (7.6)	1/2 (1.3)	31 (14)
UXT5230AD	15-5/8 (39.7)	30 (76.2)	6 (15.2)	22-1/4 (56.5)	10-1/2 (26.7)	7/8 (2.2)	10-1/4 (26)	1-3/4 (4.4)	1 (2.5)	7-1/4 (18.4)	3-3/8 (8.6)	11 (27.9)	10 (25.4)	3 (7.6)	1/2 (1.3)	31 (14)
UXT5436AD	15-5/8 (39.7)	36 (91.4)	6 (15.2)	22-1/4 (56.5)	10-1/2 (26.7)	7/8 (2.2)	10-1/4 (26)	1-3/4 (4.4)	1 (2.5)	7-1/4 (18.4)	3-3/8 (8.6)	11 (27.9)	10 (25.4)	3 (7.6)	1/2 (1.3)	31 (14)
UXT5236AD	15-5/8 (39.7)	36 (91.4)	6 (15.2)	22-1/4 (56.5)	10-1/2 (26.7)	7/8 (2.2)	10-1/4 (26)	1-3/4 (4.4)	1 (2.5)	7-1/4 (18.4)	3-3/8 (8.6)	11 (27.9)	10 (25.4)	3 (7.6)	1/2 (1.3)	31 (14)

NOTE: Ducting configuration and length can affect airflow rates. Ratings shown are based on kitchen hoods with correctly installed ducting.

MAYTAG®

Built Strong to Last Long.

maytag.com

®Registered trademark/™Trademark of Maytag Corporation or its related companies.
©2008. All rights reserved. Form No. MMCL209. Printed in the U.S.A. 8/08.